Gen 1 Trigger Guard

Tools required:

5/32" Allen Key for pistol grip

1/8" Allen Key for forearm and floorplate screw

1/16" Allen Key for trigger shoe and safety

Might need: propane torch to heat safety screws if they have LockTite from factory

1/16" brass or steel punch for trigger pivot pin. Pin punches out from the LABEL SIDE.

IMPORTANT: Place rifle upside down for this procedure as shown in the pictures!!















For trigger installation, skip to page 14

Gen 2 Trigger Guard

Tools required:

5/32" Allen Key for pistol grip

1/8" Allen Key for forearm and floorplate screw

1/16" Allen Key for trigger shoe and safety

Might need: propane torch to heat safety screws if they have LockTite from factory

1/16" brass or steel punch for trigger pivot pin. Trigger Pin punches out from the LABEL SIDE.

On rifles with the Gen 2 trigger guard, the trigger shoe screw needs to be loosened and the safety removed before removing the trigger guard screw and trigger guard.

Pay close attention to the nuts on the safety and factory trigger shoe so you don't lose them!

IMPORTANT: Place rifle upside down for this procedure as shown in the pictures!!















AirForce Texan
Trigger and Trigger Spring Replacement







AirForce Texan
Trigger and Trigger Spring Replacement





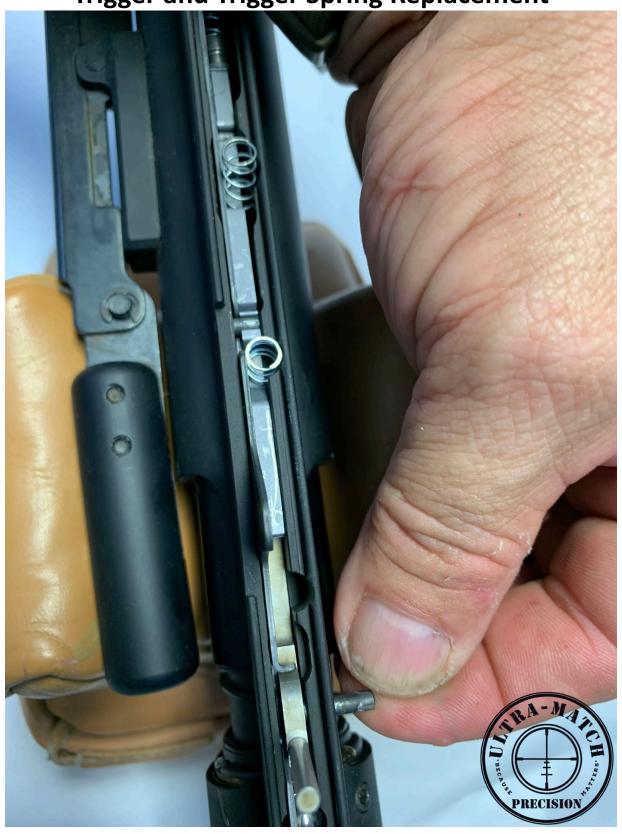

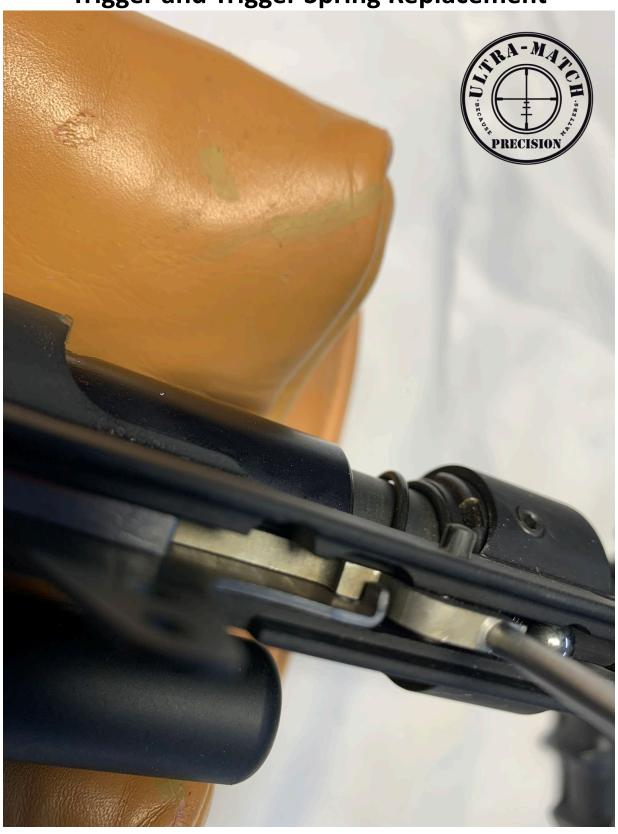

AirForce Texan
Trigger and Trigger Spring Replacement



AirForce Texan
Trigger and Trigger Spring Replacement







